


## De economische all-rounder met Europese Technische Goedkeuring (ETA) voor massieve en holle bouwmaterialen

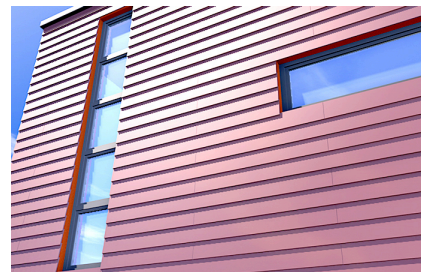

### UITVOERINGEN

- elektrolytisch verzinkt staal

### BOUWMATERIALEN

#### Goedgekeurd voor:

- Beton C12/15
- Geperforeerde baksteen
- Holle bouwsteen van licht beton
- Geperforeerde kalkzandsteen
- Volle kalkzandsteen
- Cellenbeton
- Volle bouwsteen van normaal- en lichtbeton
- Volle baksteen
- Thermische isolatieblokken

#### Tevens geschikt voor:

- Natuursteen met hoge dichtheid
- Gipsblokken

### GOEDKEURINGEN



### VOORDELEN


- De speciale werkwijze maakt gebruik mogelijk in massieve en holle bouwmaterialen en een verankeringsdiepte van slechts 50 mm, waardoor een economische bevestiging mogelijk is.
- De ETA goedkeuring omvat het gebruik in een reeks massieve en holle bouwmaterialen en garandeert een stevige bevestiging.
- De speciaal ontwikkelde combinatie van pluggen en schroeven garandeert een optimale verwerking. De plug heeft een goed zichtbare greep, wat montage nog eenvoudiger maakt.
- Het grote aantal diameters van 6, 8 en 10 mm biedt de juiste plug voor elke bevestiging.

### TOEPASSINGEN

- Gevel-, plafond en dakconstructies van hout en metaal
- Ramen
- Hekwerken en deuren
- Kledingkasten
- Kabelgoten
- Rachelwerk
- Hangende keukenkasten

### WERKING


- De SXR is geschikt voor doorsteekmontage.
- De SXR zet uit in massieve bouwmaterialen en vormt een verbinding in holle bouwmaterialen.
- Gebruik bij verticaal geperforeerde stenen alleen roterende machines (geen slagboren).
- Er worden verzonken schroeven aanbevolen voor installatie van houtconstructies; gebruik bij metaalconstructies pluggen met een brede hulskraag en een gegoten onderlegging op de schroef, die ook zorgt voor een geïntegreerde zeskantbus.

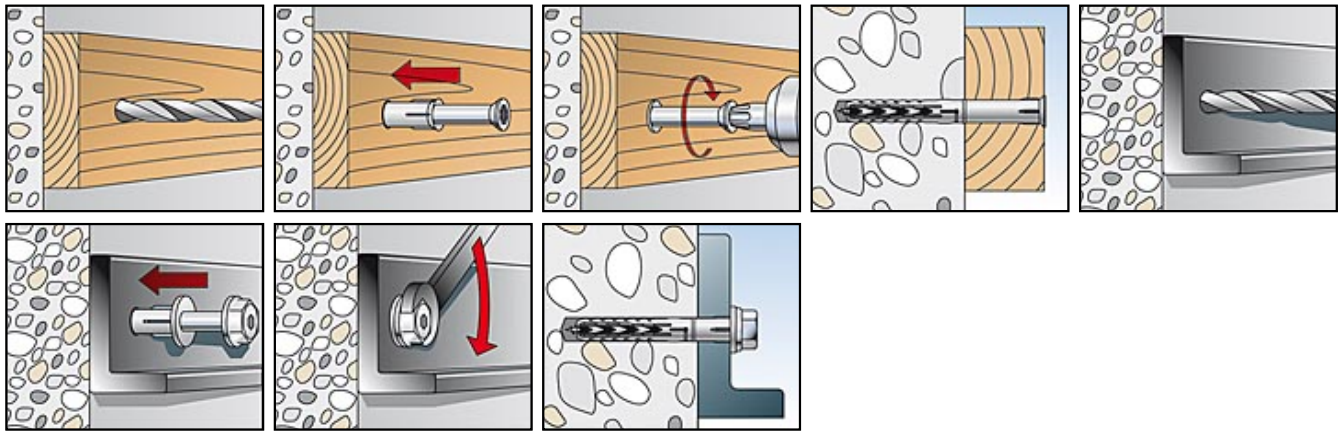

## TECHNISCHE GEGEVENS



Constructie-/kozijnplug SXR-Z

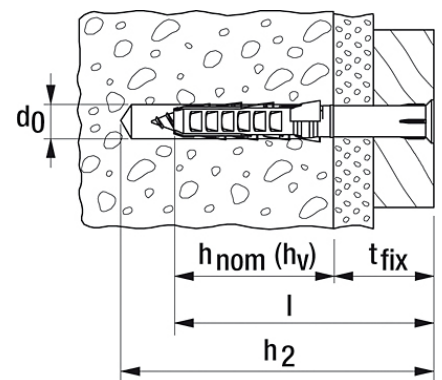

Artikelnaam	Art.-Nr.	Boor- $\varnothing$ $d_0$ [mm]	Min. boorgatdiepte bij doorsteekmontage $h_2$ [mm]	Min. verankeringsdiepte $h_{nom} (h_v)$ [mm]	Pluglengte $l$ [mm]	Max. dikte aanbouwdeel $t_{fix}$ [mm]
<b>SXR 6 x 35 Z</b>	<b>503231</b>	6	45	30	35	5
<b>SXR 6 x 50 Z</b>	<b>503232</b>	6	60	30	50	20
<b>SXR 6 x 60 Z</b>	<b>503233</b>	6	70	30	60	30

## LOADS

### Frame fixing SXR<sup>4)</sup>

Highest permissible loads<sup>1)</sup> for a single anchor for multiple fixings of non-structural applications in masonry. For the design the complete approval ETA-07/0121 has to be considered.

Type	compressive brick strength $f_b$ [N/mm <sup>2</sup> ]	brick type, naming acc. DIN [-]	min. anchorage depth $h_{nom}$ [mm]	min. member thickness $h_{min}$ [mm]	Solid brick masonry and perforated brick masonry		
					permissible load $F_{perm}^{3)5)}$ [kN]	min. spacing $s_{min}^{2)}$ [mm]	min. edge distance $c_{min}^{2)}$ [mm]
<b>Solid brick Mz</b>							
SXR 8	≥ 20	Mz	50	100	0,71	100	100
SXR 10	≥ 20	Mz	50	100	0,86	100	100
<b>Solid sand-lime brick and solid block KS</b>							
SXR 8	≥ 10	KS	50	100	0,71	100	100
SXR 10	≥ 10	KS	50	100	0,86	100	100
<b>Vertically perforated brick HLz</b>							
SXR 8	≥ 20	HLz	50	100	0,34	100	100
SXR 10	≥ 12	HLz	50	100	0,26	100	100
SXR 10	≥ 20	HLz	50	100	0,71	100	100
<b>Perforated sand-lime brick KSL</b>							
SXR 8	≥ 12	KSL	50	100	0,57	100	100
SXR 10	≥ 12	KSL	50	100	0,57	100	100
<b>Hollow block of lightweight aggregate concrete Hbl</b>							
SXR 8	≥ 10	Hbl	50	100	0,71	100	100
SXR 10	≥ 6	Hbl	50	100	0,71	100	100
SXR 10	≥ 10	Hbl	50	100	0,71	100	100
<b>Solid brick and solid block of lightweight aggregate concrete V</b>							
SXR 8	≥ 2	V	50	100	0,34	100	100
SXR 10	≥ 2	V	50	100	0,21	100	100
<b>Aerated concrete blocks and reinforced panels AAC</b>							
SXR 10	≥ 2	AAC	50	100	0,14 <sup>7)</sup>	200	100
SXR 10	≥ 6	AAC	50	100	0,27	200	100

<sup>1)</sup> The required partial safety factors for material resistance as well as a partial safety factor for load actions  $\gamma_L = 1,4$  are considered. As an single anchor counts e.g. an anchor with a minimum spacing  $s_{min}$  according table 11 resp. table 15 of the approval.

<sup>2)</sup> Minimum possible axial spacings (anchor group) resp. edge distance while reducing the permissible load. The combination of the given min. spacing and min. edge distance is not possible. One of them has to be increased according approval.

<sup>3)</sup> Valid for tensile load, shear load and oblique load under any angle. For combinations of tensile loads, shear loads and bending moments see approval.

<sup>4)</sup> Valid for zinc coated screws and for screws made of stainless steel. For exterior use of the zinc coated screws measures against incoming humidity according approval have to be taken.

<sup>5)</sup> The given values for hollow or perforated masonry apply for rotary drilling (without impact). The given loads are reference values which may change due to type of brick and manufacturer. If the embedment depth is higher than  $h_{nom} = 50$  mm, job site tests have to be carried out.

<sup>6)</sup> Valid for temperatures in the substrate up to +50 °C (resp. short term up to 80 °C). For long term temperatures up to 30 °C higher permissible loads may be possible.

<sup>7)</sup> Drill hole created by punching.

## LOADS

### Frame fixing SXR<sup>4)</sup>

Highest permissible loads<sup>1)6)</sup> for a single anchor for multiple fixings of non-structural applications in normal concrete  $\geq C12/15$  resp.  $\geq B15$ . For the design the complete approval ETA-07/0121 has to be considered.

Type	Min. anchorage depth $h_{nom}$ [mm]	Min. member thickness $h_{min}$ [mm]	Cracked or Non-cracked concrete			
			Permissible tensile load $N_{perm}^{3)}$ [kN]	Permissible shear load $V_{perm}^{3)}$	Min. spacing $s_{min}^{2)}$ [mm]	Min. edge distance $c_{min}^{2)}$ [mm]
<b>SXR 8</b>	50	100	1,0	4,2 (3,4) <sup>5)</sup>	50	50
<b>SXR 10</b>	50	100	1,8	5,4	50	60

<sup>1)</sup> The required partial safety factors for material resistance as well as a partial safety factor for load actions  $\gamma_L = 1,4$  are considered. As an single anchor counts e.g. an anchor with a spacing  $s \geq s_{cr,N}$  and an edge distance  $c \geq c_{cr,N}$  according table 8 of the approval.

<sup>2)</sup> Minimum possible axial spacings (anchor group) resp. edge distance for concrete  $\geq C16/20$  while reducing the permissible load. The combination of the given min. spacing and min. edge distance is not possible. One of them has to be increased according approval. Values for concrete C12/15 see approval.

<sup>3)</sup> For combinations of tensile loads, shear loads, bending moments as well as reduced edge distances or spacings (anchor groups) see approval.

<sup>4)</sup> Valid for zinc coated screws and for screws made of stainless steel. For exterior use of the zinc coated screws measures against incoming humidity according approval have to be taken.

<sup>5)</sup> Value in bracket applies for screws made of stainless steel.

<sup>6)</sup> Valid for temperatures in the substrate up to +50 °C (resp. short term up to 80 °C). For long term temperatures up to 30 °C higher permissible loads may be possible.

## LOADS

### Frame fixing SXR

Highest recommended loads<sup>1)</sup> for a single anchor.

The given loads are valid for wood screws with the specified diameter.

Type			SXR 6
Screw diameter	Ø	[mm]	4,5
Min. edge distance in concrete	a <sub>r</sub>	[mm]	50
<b>Recommended loads in the respective base material F<sub>rec</sub><sup>2)</sup></b>			
Concrete	≥ C20/25	[kN]	0,25
Solid brick	≥ Mz 12	[kN]	0,20
Solid sand-lime brick	≥ KS 12	[kN]	0,20
Vertically perforated brick	≥ Hlz 12 (ρ ≥ 1.0 kg/dm <sup>3</sup> )	[kN]	0,10
Perforated sand-lime brick	≥ KSL 12	[kN]	0,20

<sup>1)</sup> Required safety factors are considered.

<sup>2)</sup> Valid for tensile load, shear load and oblique load under any angle.