


QUADRA 20X20

CE2020QDR

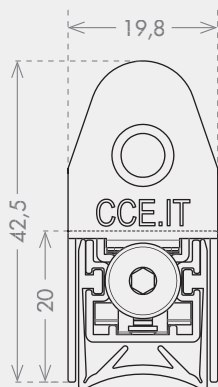

ITEM SIZE (mm)

19,8 x 42,5

GROOVE SIZE (mm)

19,9 x 20,0

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING Mill

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL GQ. Self extinguishing silicone UL94 class V0. Color: grey

CLOSING END-CAP Included. Nylon PA6 30% Fiberglass reinforced. Color: grey

ACTIVATION PLUNGER 1. Self directing articulated metal plunger with nylon cap, adjustable with 3mm Allen wrench.
Nylon PA6 30% Fiberglass reinforced. Color: black.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 14

WORKING TEMPERATURES (C°) -20° / +80°

FIXING TYPE Lateral steel brackets

CERTIFICATES

WORKING CYCLES > 200.000 (internal test)

ACOUSTIC INSULATION **55dB Rw** - PB 1-K06-04-en-01 - IFT Rosenheim

FIRE RESISTANCE **60 mins** - Cert. n. 20/22763-1241-1 - Applus Laboratories

SMOKE TESTED /

QUADRA 20X20

CE2020QDR

ITEM LENGTH mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,143	7,900	50	330 -> 280
430	0,187	10,100	110	430 -> 320
530	0,230	12,250	150	530 -> 380
630	0,273	14,400	150	630 -> 480
730	0,317	16,600	150	730 -> 580
830	0,360	18,750	150	830 -> 680
930	0,403	20,900	150	930 -> 780
1030	0,447	23,100	150	1030 -> 880
1130	0,490	25,250	150	1130 -> 980
1230	0,533	27,400	150	1230 -> 1080
1330	0,477	29,600	150	1330 -> 1180
1430	0,620	31,750	150	1430 -> 1280
1530	0,663	33,900	150	1530 -> 1380

PACKAGING

- MINIMUM PACKAGING

1 piece in nylon bag
- BOX PACKAGING

50 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.
Keep stored in a dry place, protected from water, solvents and direct sunlight.

