


PVC PLUS

CE1530PVP

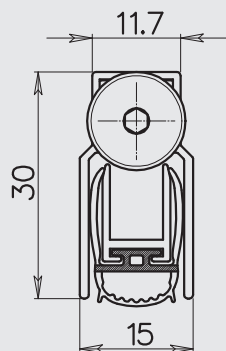

ITEM SIZE (mm)

11,7 (15) x 28

GROOVE SIZE (mm)

11,8 (15,1) x 28

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530 - 1630 - 1730 - 1830

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING Mill

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL F. Sound-insulating seal in self-extinguishing thermoplastic. Color: grey

CLOSING END-CAP Not Included.

ACTIVATION PLUNGER 1. Self directing articulated metal plunger with nylon cap, adjustable with 3mm Allen wrench. Nylon PA6 30% Fiberglass reinforced. Color: black.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 14

WORKING TEMPERATURES (C°) -35° / + 200°

FIXING TYPE 2F. With premounted screws (3,5x20 countersunk nickel plated screws) or

3F. removing the inner profile (screws not included).

CERTIFICATES

WORKING CYCLES 200.000 (internal test)

ACOUSTIC INSULATION /

FIRE RESISTANCE /

SMOKE TESTED /

PVC PLUS

CE1530PVP

ITEM LENGHT mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,147	8,200	50	330 -> 280
430	0,191	10,400	135	430 -> 295
530	0,23	12,650	150	530 -> 380
630	0,280	14,850	150	630 -> 480
730	0,324	17,050	150	730 -> 580
830	0,368	19,250	150	830 -> 680
930	0,412	21,450	150	930 -> 780
1030	0,456	23,650	150	1030 -> 880
1130	0,500	25,850	150	1130 -> 980
1230	0,544	28,050	150	1230 -> 1080
1330	0,588	30,250	150	1330 -> 1180
1430	0,632	/	150	1430 -> 1280
1530	0,676	/	150	1530 -> 1380
1630	0,720	/	150	1630 -> 1480
1730	0,764	/	150	1730 -> 1530
1830	0,808	/	150	1830 -> 1680

PACKAGING

MINIMUM PACKAGING 5 pieces

BOX PACKAGING 50 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.

Keep stored in a dry place, protected from water, solvents and direct sunlight.