




Con **slitta antiripetitore**:
sganciamento permanente dopo
l'impulso elettrico. La chiusura viene ripristinata
dopo che la porta è stata aperta e chiusa
Con **leva fermo a giorno**

- Scrocco regolabile fino a 5 mm.
- Reversibile
- Corpo di dimensioni ridotte per ogni impiego
- La slitta fatta a cuneo (antiripetitore) facilita lo sgancio dello scrocco serratura
- Alimentazione corrente alternata e continua unificata
- Lunga durata: 250.000 cicli
- Resistenza alla spinta sullo scrocco: 350 kg
- Assorbimento da 0.5 a 0.8 A
- Alimentazione 6 - 12 V AC - DC o 24 V AC - DC
- Per serrature con interasse 72 - 85 - 92 mm
- Abbinabile a frontali in acciaio inox satinato

With permanent release:
lock is permanently released upon electrical contact. Locking function is restored upon the door being opened and closed again

With hold open lever

- **Fajix (5 mm.)**
- **Reversible**
- **Low core dimension for all use**
- **Slide, made a wedge (permanent release), make easy latch bolt released**
- **Power supply unified version alternate current and direct current**
- **Long life span 250,000 cycles**
- **Pressure resistant on the latch bolt 350 Kg**
- **Input from 0.5 to 0.8 A.**
- **Power supply 6 - 12V AC - DC or 24 VAC - DC**
- **For locks 72 - 85 and 92 mm. distance**
- **Available with front plate in brush-polished stainless steel**

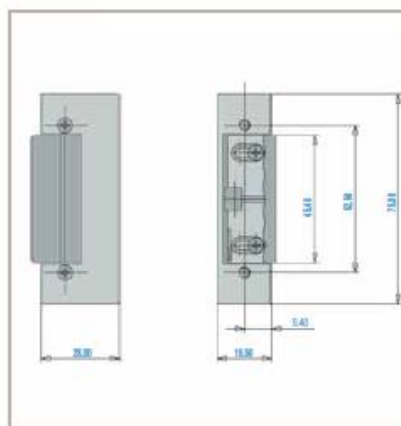

Codice / Code	Alimentazione Power Supply		
SOLO CORPO - CORE ONLY			
16160/1	6 - 12 V AC - DC	182	12
16160/8	24 V AC - DC	178	12