



Artikel	Max. deurbreedte mm	Bestelnr.	VE
KA 5740/300	300	0 041 371	1 set
KA 5740/350	350	0 041 372	1 set
KA 5740/400	400	0 041 373	1 set
KA 5740/450	450	0 041 374	1 set
KA 5740/500	500	0 041 375	1 set
KA 5740/550	550	0 041 376	1 set
KA 5740/600	600	0 041 377	1 set
KA 5740/650	650	0 041 378	1 set
KA 5740/700	700	0 041 379	1 set

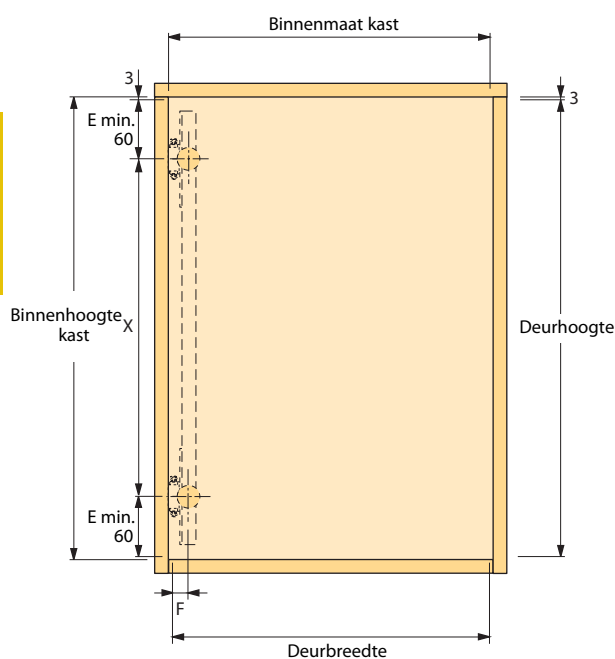


Deurhoogte = binnenhoogte kast - 6 mm  
Deurbreedte = binnenbreedte kast - 6 mm  
X = deurhoogte - 2 x E

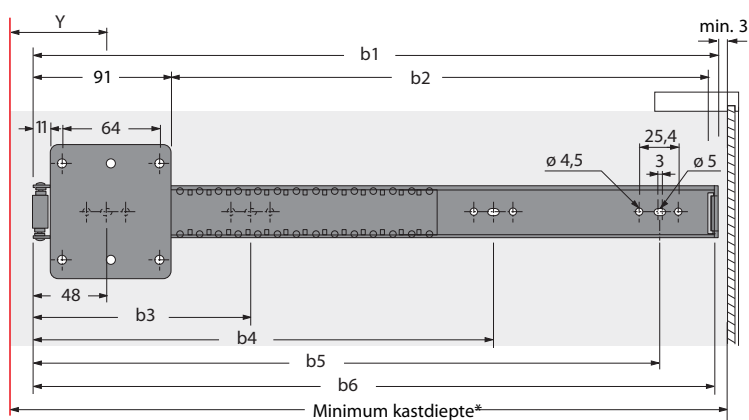

Y = deurdikte + 50 mm

\* Min. kastdiepte = (nominale lengte + 2 mm) + (deurdikte + 2 mm)  
+ achterste voeg (min. 3 mm)

Artikel	Maat mm					
	b1	b2	b3	b4	b5	b6
KA 5740/300	302	206	272	-	-	300
KA 5740/350	352	256	304	-	-	350
KA 5740/400	402	306	368	-	-	400
KA 5740/450	452	356	144	304	400	450
KA 5740/500	502	406	176	336	464	500
KA 5740/550	552	456	208	368	528	550
KA 5740/600	602	506	240	400	560	600
KA 5740/650	652	556	272	432	624	650
KA 5740/700	702	606	304	464	656	700

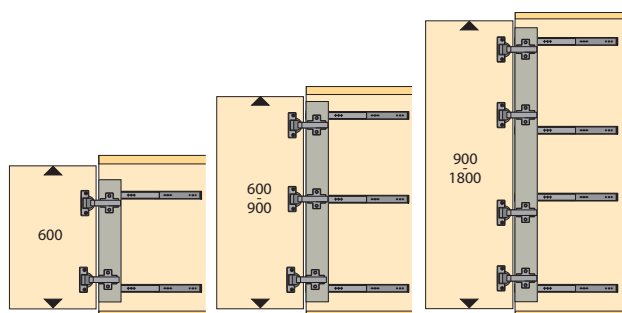

Aanbevolen aantal draaischuifdeurbeslagen  
KA 5740 afhankelijk van de deurhoogte.